


Perfection in machining

GUHRING

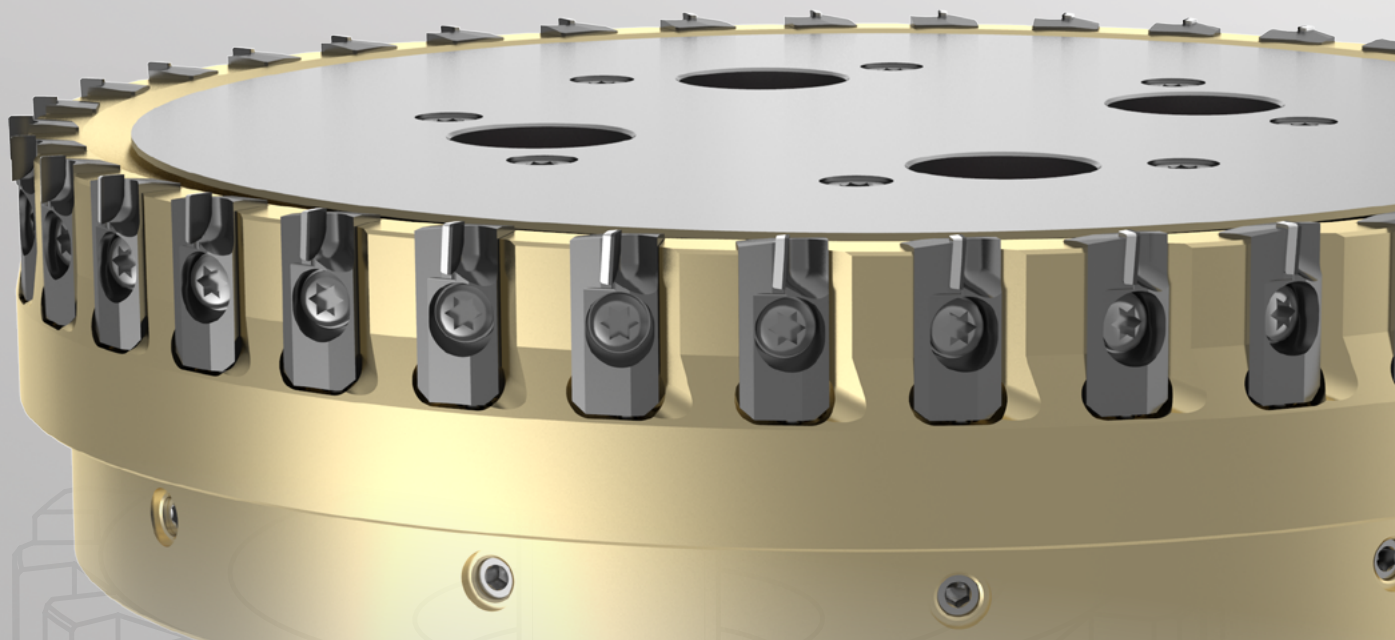

PF 3000 Face Milling Cutter

GUHRING - YOUR WORLD-WIDE PARTNER



ADVANTAGES

axially adjustable inserts

standard tool Ø 63–250 mm available ex-stock

reduced spindle loading thanks to light aluminium body (i.e. 7.3 kg with D = 250 mm)

surface finish qualities up to Rz 2 achievable

compatible with **standard tool holders**

PCD inserts available with different geometries

with integrated balancing screws

Basic milling cutter body in aluminium with refined surface finish:

The basic milling cutter body is manufactured in high-tensile aluminium for the reduction of mass. This reduces the forces on your machine spindle bearing.

PCD inserts:

The cutter heads are available from Ø 63 to 250 mm and carry up to 36 PCD inserts depending on diameter. The PCD inserts are available with different geometries and can be re-ground up to three times.

Coolant distribution disc:



The coolant distribution disc mounted on the basic milling cutter body (up to including Ø 125 mm with coolant distribution screw) ensures an optimal distribution of the delivered coolant to the inserts. It also guarantees the perfect seat of the basic milling cutter body – even at maximum speeds.

Insert axial run-out
µm accurate adjustable

Balancing screws
for optimal smooth
running



PF 3000

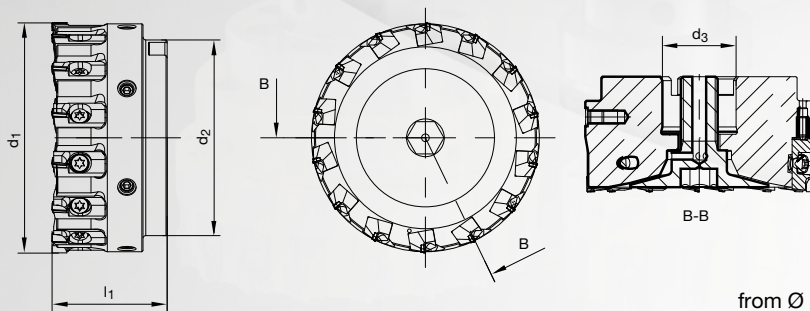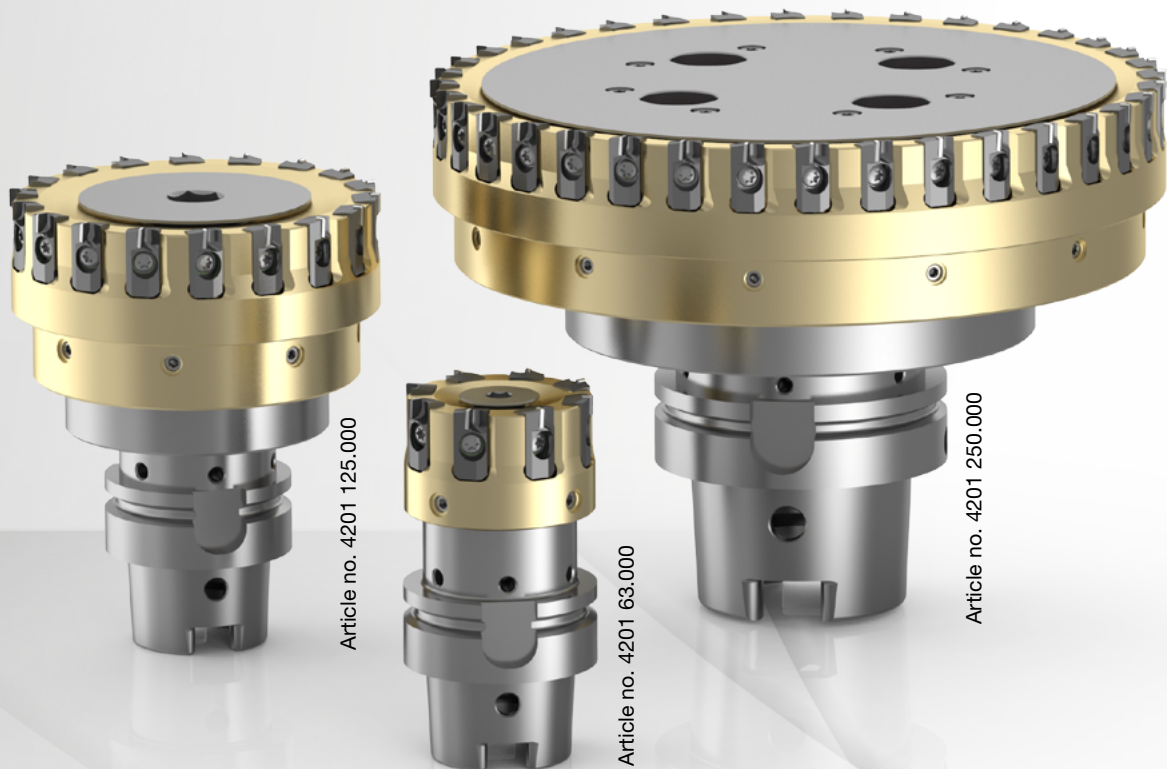**Carrier tools***

from Ø 160 mm with coolant distribution disc

Article no. 4201



d1	d2	d3	l1	Z	Weight	Code no.
mm	mm	mm	mm		kg	
63.00	49.00	22.00	40.00	8	0.34	63.000
80.00	65.00	27.00	50.00	10	0.61	80.000
100.00	85.00	32.00	50.00	14	0.94	100.000
125.00	110.00	40.00	63.00	18	1.77	125.000
160.00	145.00	40.00	63.00	24	3.15	160.000
200.00	185.00	60.00	63.00	28	4.89	200.000
250.00	235.00	60.00	63.00	36	7.84	250.000

* Tool holder, inserts and coolant distribution disc (up to including Ø 125 mm) are not included in the scope of delivery, please order separately.



Standard range – inserts, replacement parts and accessories

Inserts



Article no. 4204


Application	l1	l2	weight	Code no.
	mm	mm	kg	
Good surface finish quality Rz 2 to 4	23.00	6.45	0.156	30.000
Defined peak-to-valley height Rz 10 to 25	23.00	6.45	0.158	30.200
Broad finishing*	23.00	6.45	0.159	30.300

* Optimising the waviness only in combination with code no. 30.000 or 30.200.

Ø 63 – 100 mm: 2x Article no. 4204 - 30.300

Ø 125 – 250 mm: 3x Article no. 4204 - 30.300


Clamping screw M5 x 17



Article no. 6128

Torx	l1	G	Code no.
	mm		
20	17	M5	5.000


Washer



Article no. 4207

d1	d2	l1	Code no.
mm	mm	mm	
5.10	8.00	2.00	30.000



Ball pressure screw



Article no. 20081

l1	G	SW	Code no.
mm			
10.00	M4	2.000	4.000

Coolant distribution screw / coolant distribution disc



Article no. 4203

Description	l1	G	SW	Code no.
	mm			
Coolant distribution screw for Ø 63	39.00	M10	8.000	63.000
Coolant distribution screw for Ø 80	47.00	M12	10.000	80.000
Coolant distribution screw for Ø 100	48.00	M16	14.000	100.000
Coolant distribution screw for Ø 125	58.00	M20	17.000	125.000
Coolant distribution disc for Ø 160				160.000
Coolant distribution disc for Ø 200				200.000
Coolant distribution disc for Ø 250				250.000




Cutting data recommendations, application examples

The specified values are guide values.

They are heavily affected by machine, equipment and workpiece stability.

Machining groups	Material group	Composition / structure	Hardness	Cutting speed v_c m/min	Feed rate f_z (mm)	
			HB		Article no. 4204 30.000 (good surface finish quality) Article no. 4204 30.300 (broad finishing)	Article no. 4204 30.200 (defined peak-to-valley height)
21	Aluminium wrought alloy	not hardenable	60	to 6000	0.05–0.20	0.10–0.25
22		hardenable / hardened	100	to 6000	0.05–0.20	0.10–0.25
23	Aluminium cast alloy	<12% Si not hardenable	75	to 6000	0.05–0.20	0.10–0.25
24		<12% Si hardenable / hardened	90	to 6000	0.05–0.20	0.10–0.25
25		>12% Si not hardenable	130	to 2000	0.05–0.20	0.10–0.25
26	Copper	Machine alloy Pb >1%	110	to 2000	0.05–0.20	0.10–0.25
27	Copper alloy	CuZn. CuSnZn	90	to 2000	0.05–0.20	0.10–0.25
28	(bronze, brass)	Cu lead-free copper/electrolyte copper	100	to 2000	0.05–0.20	0.10–0.25

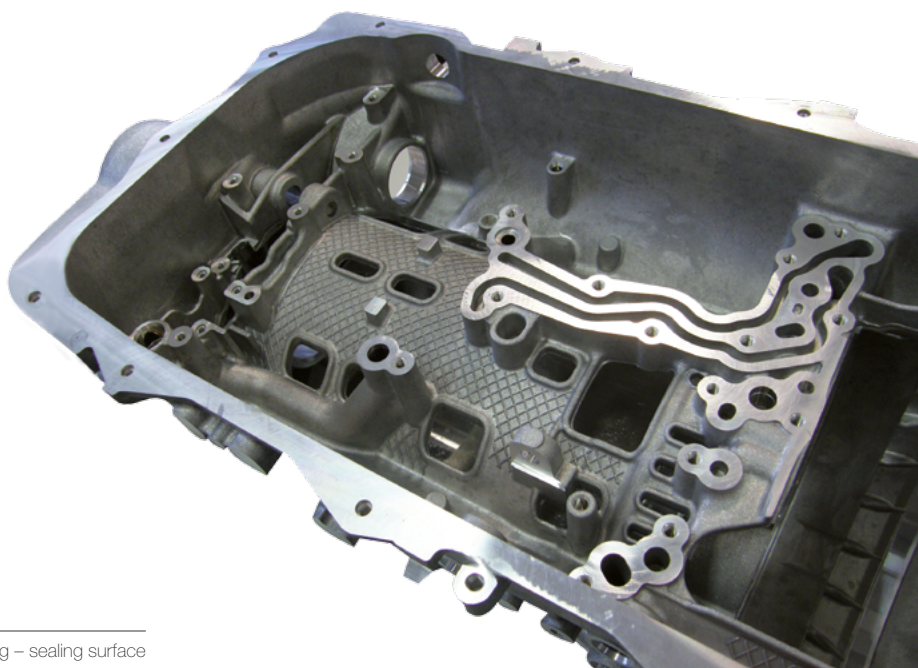

PF 3000 for finish machining sealing surface milling


Workpiece	Transmission housing – sealing surface
Material	GD-AlSi9Cu3
Tools	PF 3000, D = 63 mm, Z = 8, HSK 63-A
Cutting speed	$v_c = 2.970$ m/min
Speed	$n = 15.000$ rev./min
Feed rate per tooth	0.05 mm
Feed speed	6.000 mm/min
Cutting depth	0.5 mm
Achieved surface finish quality	$R_z = 5$, $P_t = 7$, evenness = 0.025



Assembly and operating instructions

Designation of individual components

The exploded views below serve to clarify the designation of the individual components

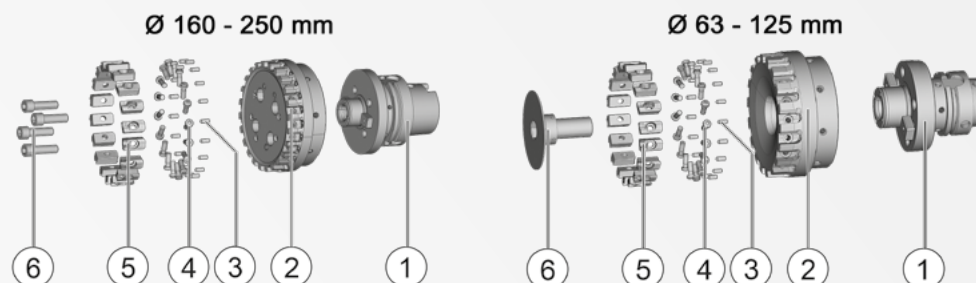

1	GUHROJET cutter head holder	3	Ball pressure screw	5	PCD cartridge
2	Basic body (from Ø 160 mm with pre-installed coolant distribution disc)	4	Clamping screw	6	Coolant distribution screw to Ø 125 mm / cheese-head screws from Ø 160 mm

1. Assembly of ball pressure screws



The ball pressure screws in delivery condition are pre-assembled.
After you have checked that the ball pressure screws do not protrude into the cartridge seat you can continue with "2. Cartridge assembly".

If you want to replace the ball pressure screws proceed as described below.

1. Lubricate the thread of the ball pressure screw with assembly paste.
This guarantees a smooth adjustment.
2. Using the Allen key screw the ball pressure screw (1) into the basic body (2).

► The ball pressure screw must not protrude into the cartridge seat (3) for the cartridge to be able to be installed in the lowest position.



3. Assemble the remaining ball pressure screws in the same way.



2. Cartridge assembly

1. Install the cartridge (2) in the lowest position on the basic body (1).
2. Lubricate the thread of the clamping screw with the assembly paste.
3. Locate the cartridge with the washer (4) and the clamping screw (3).
Use the Torx key T20


4. Repeat the steps with all cartridges.

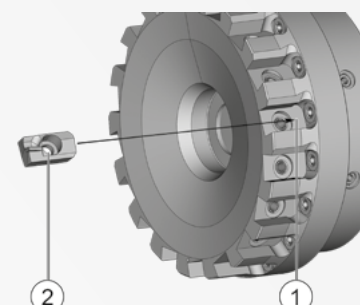




3. Mounting shell mill on GUHROJET cutter head holder

1. In delivery condition the GUHROJET cutter head holder has a balancing quality of G6.3/15.000 rev./min (static). If you use another cutter head holder ensure that it also has a balancing quality of G6.3/15.000 rev./min. Balancing may be necessary prior to mounting the shell mill.
2. Locate the GUHROJET cutter head holder in a tool assembly block (i.e. Guhring no. 4990). The following assembly steps must not be carried out in the spindle by setting or measuring machines.
3. Push the shell mill onto the GUHROJET cutter head holder. Pay attention to the grooves and key blocks (2).

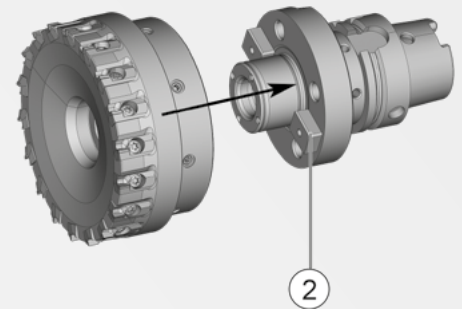


4. For tool diameter **up to 125 mm**:
Screw both components together with the coolant distribution screw (3).
Use the torque wrench with a suitable hexagonal socket key.
Adhere to the tightening torque figures in the table below.

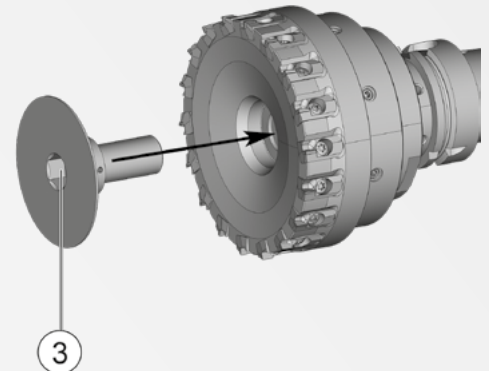

For tool diameter **from 160 mm**:

The coolant distribution disc is pre-installed in the shell mill.
Push the shell mill (4) onto the GUHROJET cutter head holder (3).
Screw both components together with the 4 cheese-head screws (5).
Use the torque wrench with a suitable hexagonal socket key.
Adhere to the tightening torque figures in the table below.

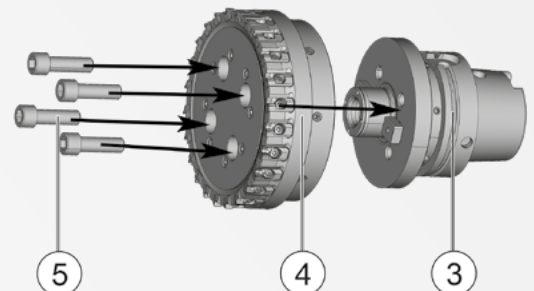


Tool diameter		Nominal dimension	Torque Ma
Ø 63	Coolant distribution screw 4203 63.000	SW 8	60 Nm
Ø 80	Coolant distribution screw 4203 80.000	SW 10	80 Nm
Ø 100	Coolant distribution screw 4203 100.000	SW 14	95 Nm
Ø 125	Coolant distribution screw 4203 125.000	SW 17	100 Nm
Ø 160	4x cheese-head screws M12	SW 10	85 Nm
Ø 200	4x cheese-head screws M16	SW 14	200 Nm
Ø 250	4x cheese-head screws M16	SW 14	200 Nm

Torque specification table




4. Cartridge adjustment

1. With all the cartridges in the axial lowest position: Tighten the clamping screw with torque wrench to approximately 1 Nm.
2. Adjust all the cartridges to 0.02 to 0.03 mm less than the setting dimension using the Allen key. When doing this turn the ball pressure screw (1) clockwise. Specifications of the setting dimension can be found in the attached tool drawing.

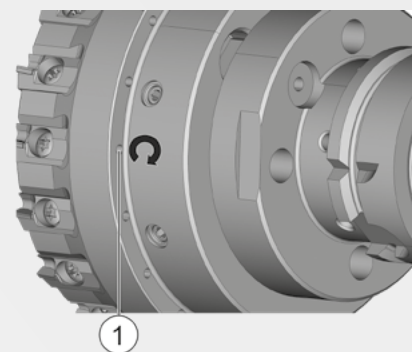


3. Tighten all the clamping screws (2) with the torque wrench to 5 Nm.
4. Adjust all the cartridges to the setting dimension. The axial run-out may not exceed 0.002 mm.
5. Record the adjustments.

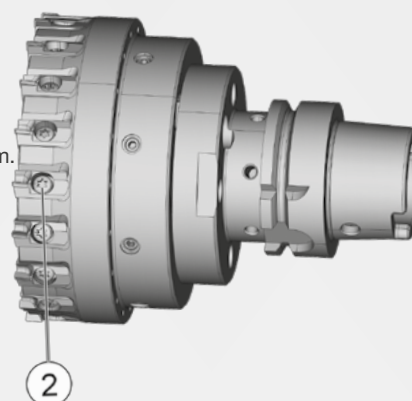

5. Balancing the fully assembled tool

1. Balance the tool to a balancing quality of G6.3/ 15,000 rev./min (static). Apply the balancing screws (1). Other balancing qualities on request.

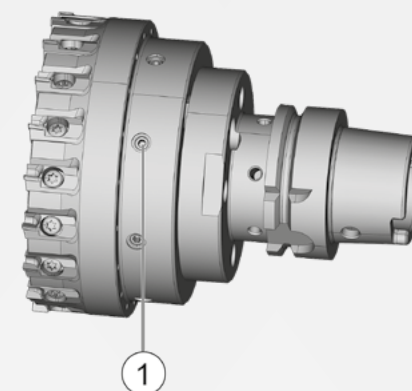


**GUHROJET HSK-A cutter head holders****GUHROJET****Product information**

- HSK-A to ISO 12164-1/DIN 69893-1
- for holding milling cutter heads
- balancing quality: G6.3 / 15.000 rev./min
- to DIN 69882-3
- for central and de-central internal cooling;
therefore process and tool life improvement
- holder Ø 40 and Ø 60 additionally with 4 threaded holes for holding
cutter heads with tool fixing to DIN 2079 and enlarged device Ø D2

Scope of delivery

- incl. milling cutter tightening screw
Article no. 4908 and key blocks

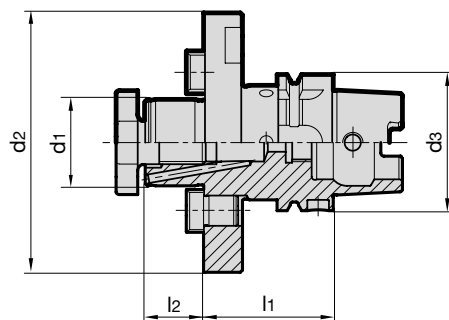Article no. **4362**

HSK-A d3	Arbor Ø d1	d2	l1	l2	kg
	mm	mm	mm	mm	
63	22	50	50	19	1.1
63	27	60	60	21	1.3
63	32	78	60	24	1.5
63	40	120	60	27	2.7
63	40	89	60	27	2.7
80	27	60	50	21	1.8
80	32	78	50	24	2.1
80	40	120	60	27	3.3
80	60	160	70	40	6.3
80	40	89	60	27	3.3
100	27	60	50	21	2.9
100	32	78	50	24	3.3
100	40	120	60	27	4.2
100	60	160	70	40	7.2
100	40	89	60	27	4.2

Code no.
22.063
27.063
32.063
40.063
140.063
27.080
32.080
40.080
60.080
140.080
27.100
32.100
40.100
60.100
140.100




Coolant delivery sets for conventional cooling

Product information

- sealing capacity of screw connection tested up to 80 bar
- to DIN 69895
- F = angle movement $\pm 1^\circ$
- for HSK-A and HSK-E hollow taper shanks

Scope of delivery

- incl. union nut and O-rings

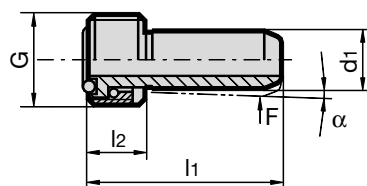

Article no. **4949**

for	d1	α	F	G	l1	l2
HSK-A	mm	°			mm	mm
63	12	1.3	6N	M18x1	36.5	11.5
80	14	1.4	7N	M20x1.5	40.0	13.5
100	16	1.4	7N	M24x1.5	44.0	15.5

Code no.

18.063

20.080

24.100


Data carrier coding chip

Product information

- BIS C identification systems
- for installation space to DIN 69 873
- data carrier writeable/readable
- 511 Bytes
- operating temperature $0... + 70^\circ\text{C}$
- degree of protection to IEC 60529
- product data exchange to DIN 4000
- to be glued in hole $\varnothing 10$ H11

Scope of delivery

- data carrier coding chip
- installation in clamping chuck and additional balancing can be ordered separately.



Article no. **4955**

Coding chip BIS C


10 x 4.5

Code no.

10.000

**Socket spanner for coolant delivery sets****Product information**

- with T-bar
- for conventional and for MQL coolant delivery sets
- for assembly adapter Article no. 4948

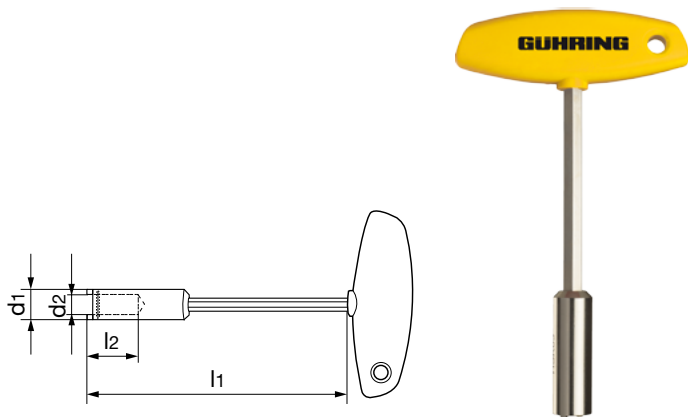Article no. **4911**

for	d1	d2	l1	l2
HSK	mm	mm	mm	mm
63	17.0	12.1	135	31.5
80	20.0	14.1	138	32.0
100	22.5	16.1	138	35.0

Code no.


48.000

60.000

75.000

Socket spanner**Product information**

- suitable for torque wrench Article no. 4915, 3/8" drive
- for coolant delivery sets

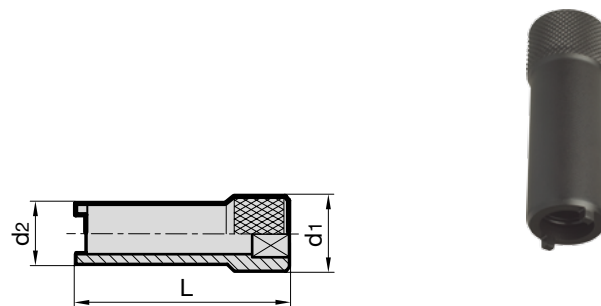Article no. **4910**

for	MA	d1	d2	L
HSK	Nm	mm	mm	mm
63	20	20	18	60
80	25	20	20	75
100	30	22	22	80

Code no.

48.000

60.000


75.000

Assembly of coolant delivery sets 4949

1. The HSK holder must be clean and free of chips and undamaged.
2. Grease the O-rings prior to assembly.
3. Insert the complete coolant delivery set (coolant tube, union nut and 2 O-rings) centrally into the HSK using the socket spanner.
4. Screw in and tighten the coolant delivery set / coolant delivery sets (torque see table right).
5. Check the coolant tube for radial movement.

Torque

for HSK	MA Nm
63	20
80	25
100	30

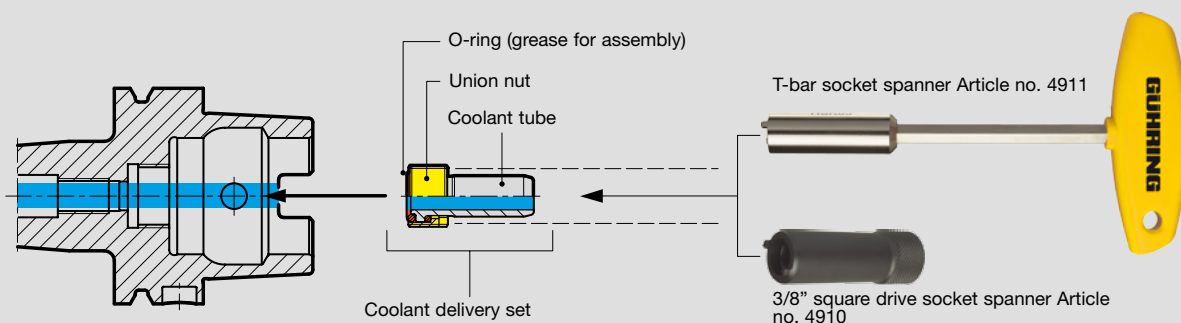



SK cutter head holders




Product information

- for holding cutter heads
- balancing quality: G6.3 / 15,000 rev./min
- SK to DIN ISO 7388-1 Form AD/AF
- for central and de-central internal cooling, therefore process and tool life improvement
- coolant delivery form AD/AF
- holder Ø 40 additionally with 4 threaded holes for holding cutter heads with tool fixing to DIN 2079 and enlarged device Ø d2.

Scope of delivery

- incl. cutter tightening screw Article no. 4908 and key blocks

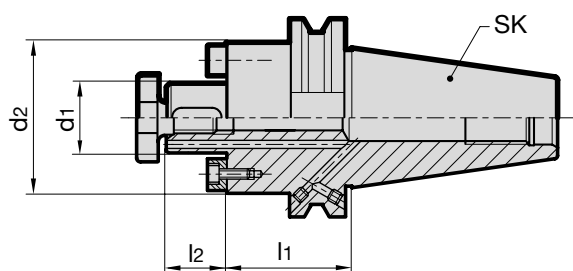

Article no.

4231

SK	Arbor Ø d1	d2	l1	l2
	mm	mm	mm	mm
40	22	48	35	19
40	27	58	40	21
40	32	78	50	24
40	40	88	50	27
50	22	48	35	19
50	27	58	40	21
50	32	78	50	24
50	40	88	50	27

Code no.

22.040

27.040

32.040

40.040

22.050


27.050

32.050

40.050

**SK DIN ISO 7388-3 form AD pull studs****Product information**


- for SK tool holders to DIN ISO 7388-3 form AD
- drilled through for central internal coolant delivery

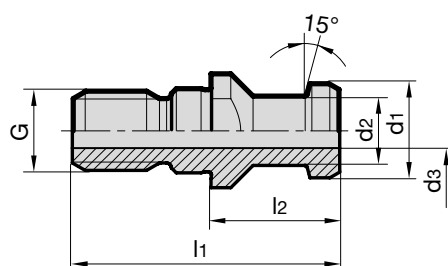Article no. **4925**

for	d1	d2	d3	l1	l2	G
SK	mm	mm	mm	mm	mm	
40	19.0	14.0	7.0	54.0	26	M16
50	28.0	21.0	11.5	74.0	34	M24

Code no.40.000
50.000**SK DIN ISO 7388-3 form AF pull studs****Product information**

- for SK tool holders to DIN ISO 7388-3 form AF
- drilled through for central internal cooling

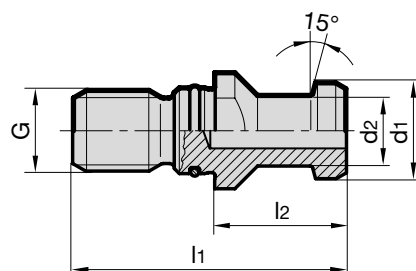Article no. **4926**

für	d1	d2	l1	l2	G
SK	mm	mm	mm	mm	
40	19.0	14.0	54.0	26	M16
50	28.0	21.0	74.0	34	M24

Code no.40.000
50.000



Tool assembly blocks

Product information

- incl. interchangeable inserts Article no. 4991



Interchangeable inserts

Product information

- for tool assembly blocks Article no. 4990

Lieferumfang

- pair



Article no. 4990						Code no.
for	for	length	width	height	kg	
HSK-A/C	SK	mm	mm	mm		
–	40	260	130	160	9	400.040
–	50	260	130	160	9	400.050
63	–	260	130	160	9	450.063
80	–	260	130	160	9	450.080
100	–	260	130	160	9	450.100

Article no. 4991			Code no.
for	for	kg	
HSK-A/C	SK		
–	40	1.50	400.100
–	50	1.50	400.200
63	–	0.12	450.400
80	–	0.27	450.500
100	–	0.46	450.600

Torque wrench

Product information

- with reversible ratchet
- torque setting range 1...200 Nm; with automatic quick release; audible, visible and palpable after reaching the set value. Release accuracy $\pm 4\%$ of scale value.



Article no. 4915				Code no.
Type	Drive	L	Torque	
		mm	Nm	
A	1/4"	160	1-5	5.001
B	3/8"	390	5-50	50.000
C	1/2"	514	40-200	200.000



GUHRING

Postfach 100247 • 72423 Albstadt
Herderstraße 50-54 • 72458 Albstadt

T (0 74 31) 17-0
F (0 74 31) 17-21279

info@guehring.de
www.guehring.de

No liability can be accepted for printing errors or technical changes of any kind.
Our Conditions of Sale and Terms of Payment apply. Available on request.