

powertap

UNIVERSAL TAPS


MADE BY

GUHRING

PERFECT CHOICE
FOR ALL MATERIALS

TOP G... TRI...
FORME... RS...
UNIVE... TA...
pow... ert...
PERFECT...
CHOICE...
PROCE...
PERFEC...
UNIV...
pow...
POWER...

PERFECT CHOICE
FOR ALL
MATERIALS
UNIVERSAL TAPS
POWERPRICE
POWERPRICE DIN 5156 more
TAL UNC power
UNIVERSAL TAPS
RSAL perfect thread-
TAPS form UNF THREADS

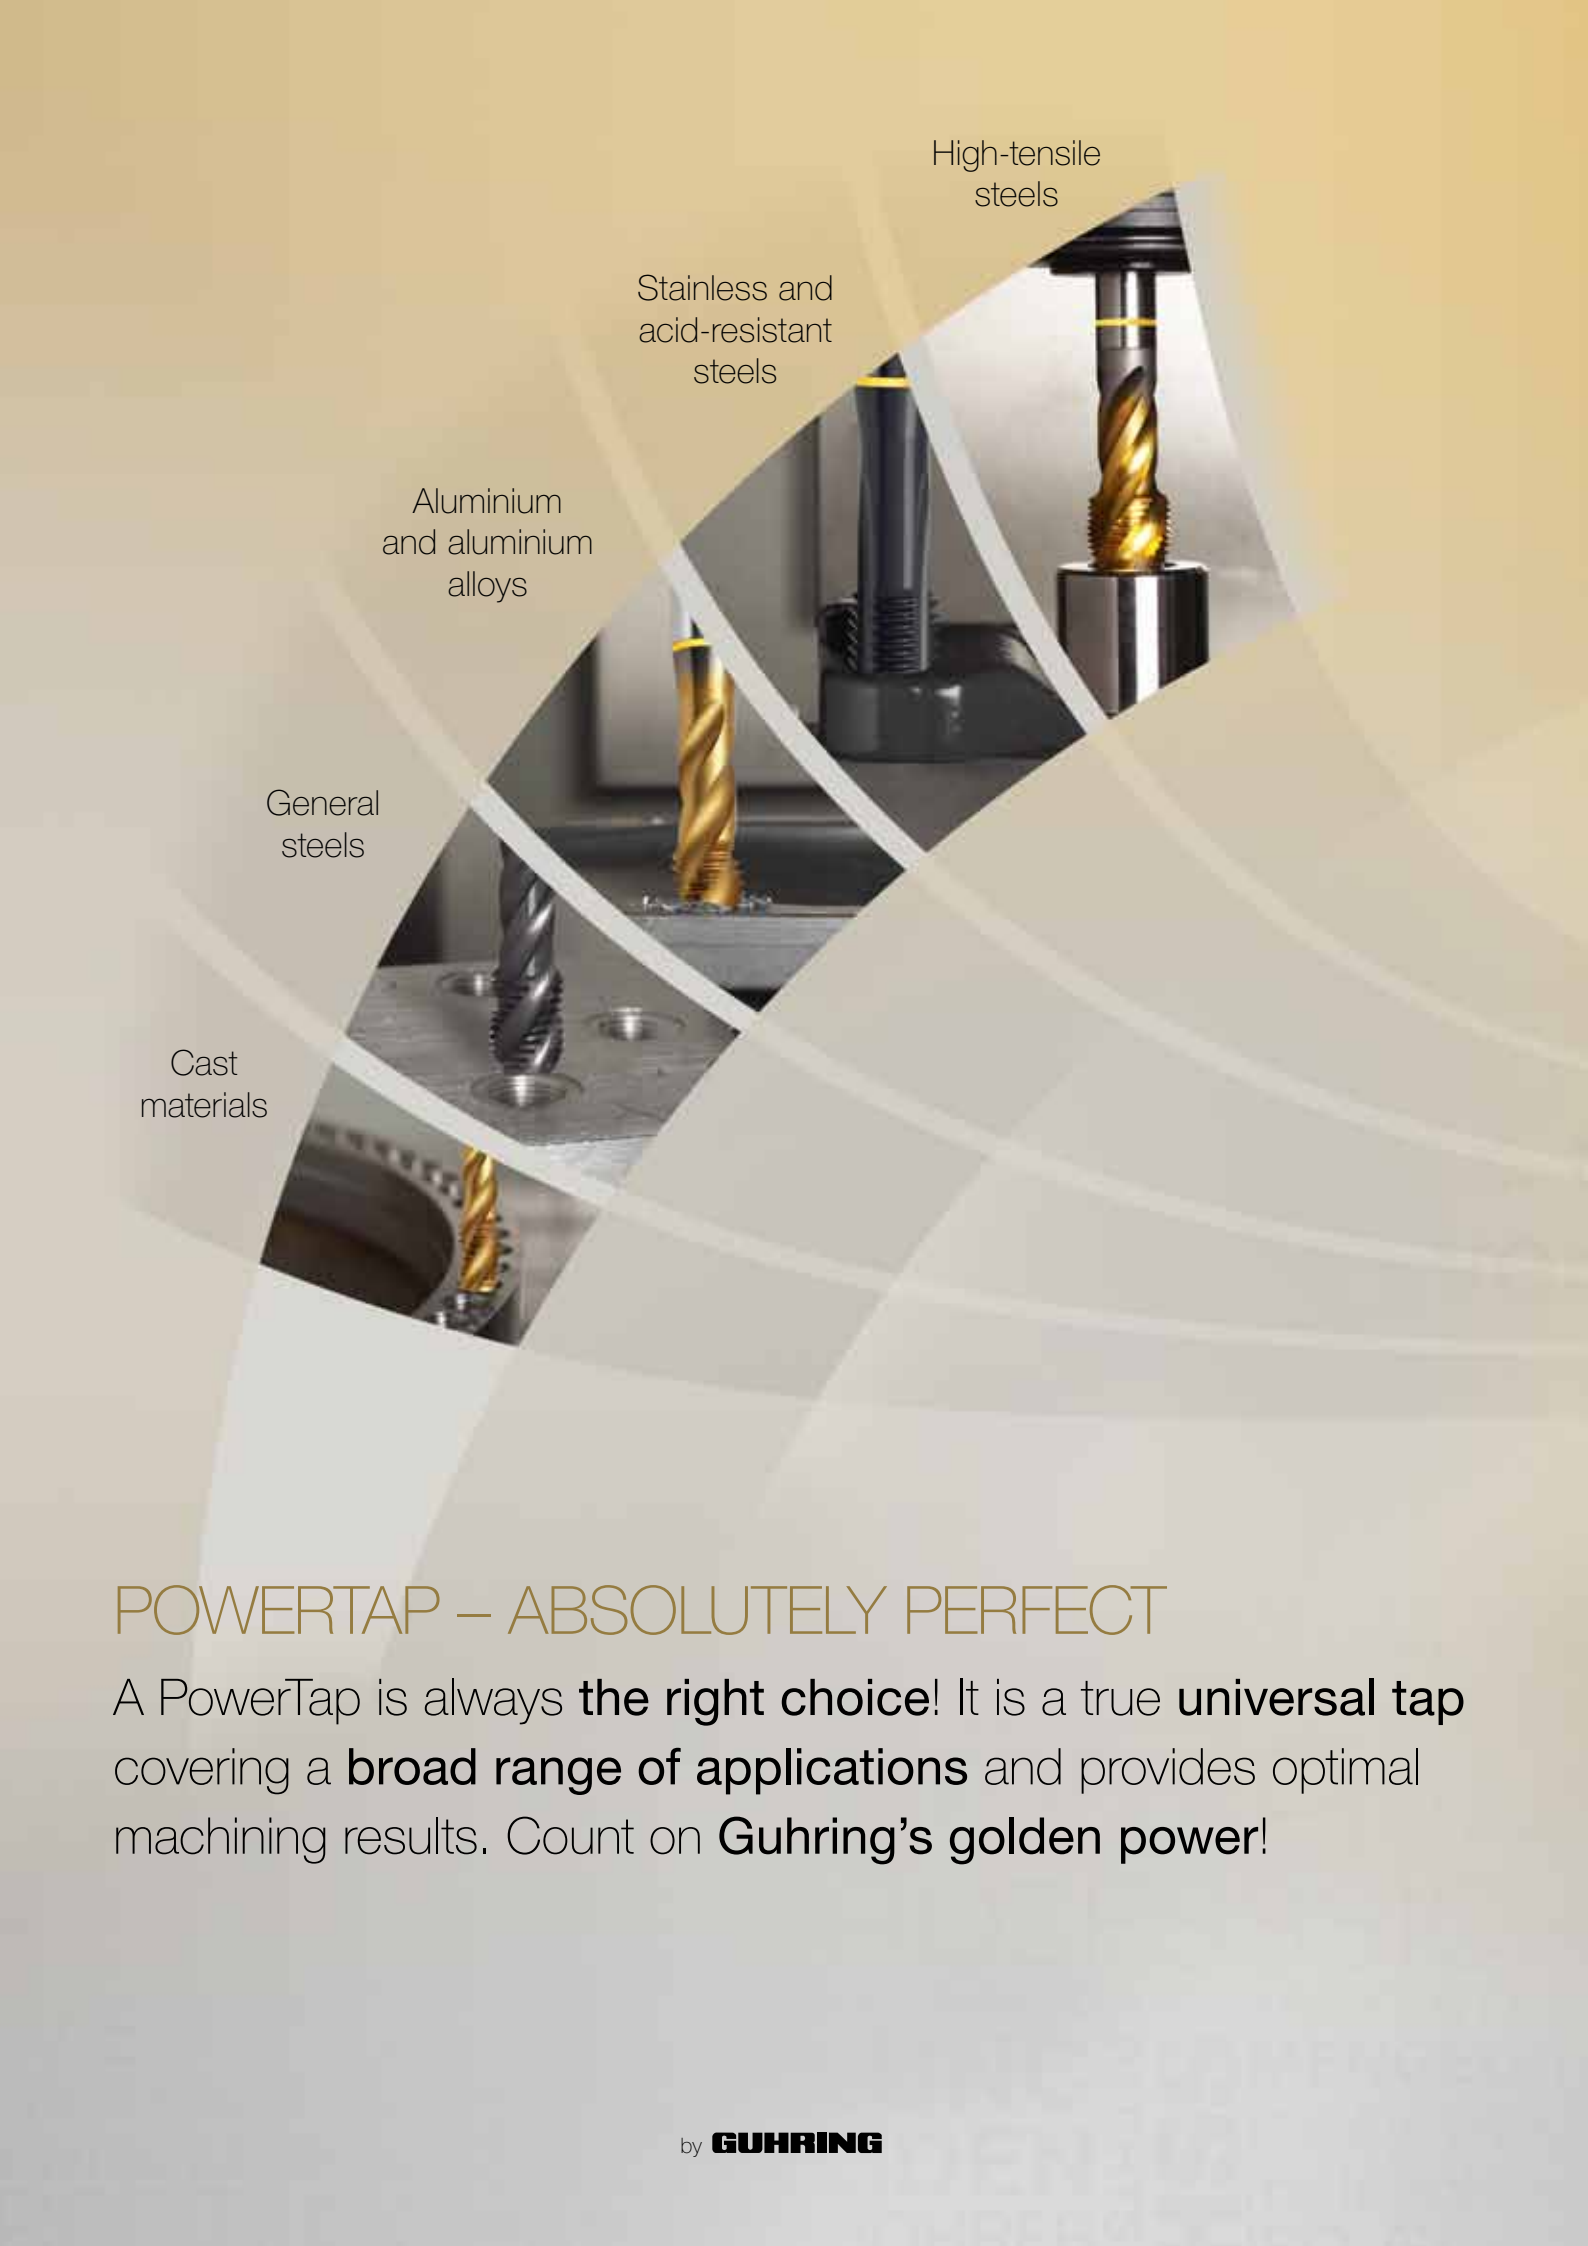

High-tensile
steels

Stainless and
acid-resistant
steels

Aluminium
and aluminium
alloys

General
steels

Cast
materials

POWERTAP – ABSOLUTELY PERFECT

A PowerTap is always **the right choice!** It is a true **universal tap** covering a **broad range of applications** and provides optimal machining results. Count on **Guhring's golden power!**

*power***tap**



GOLD FOR MAXIMUM POWER

Everything is just right with Guhring's new PowerTaps: Performance, quality, price and universal application range. Guhring's PowerTap program includes powerful taps for the most common threads. State-of-the-art manufacturing technology guarantees highest quality "Made in Germany" at unmatched low prices. In addition, the special geometry of Guhring PowerTaps makes them genuine all-rounders in close to all materials.

The golden ring indicates: With a Guhring PowerTap you are spot-on!

by **GUHRING**

MORE POWER FOR YOUR PRODUCTION

PowerTap – top quality from Germany at a power price

YOUR ADVANTAGES:

- » UNMATCHABLE PRICE-PERFORMANCE RATIO
- » MAXIMUM STOCK AVAILABILITY
- » SUPER QUALITY
- » SHORT DELIVERY TIMES
- » LONG TOOL LIFE
- » PERFECT THREADS
- » MAXIMUM PROCESS RELIABILITY

Optimised geometries for maximum performance!



Completely precision ground on specially developed machines!



Finest quality steels as tool material!



More power for your production!



In Treuen/Saxony Guhring has built for you: **4000 m² facility with state-of-the-art manufacturing technology!**



Tool material			HSS-E	HSS-E	HSS-E-PM	HSS-E	HSS-E-PM	HSS-E	HSS-E-PM
Type/form			NR40/C	NR40/C	NR40/C	NR40/E	NR50/C	N/B	N/B
Surface finish									
Cooling									
			Blind holes	Blind holes	Blind holes	Blind holes	Blind holes	Through holes	Through holes
Thread type	Tolerance zone	Dim. to DIN 2184-1	Guhring no. Ø-range Prices on page						
M	ISO 2 6H	DIN 371	5734 M3 – M10 p. 8	5737 M2 – M10 p. 9		5721 M3 – M10 p. 13	5722 M3 – M10 p. 14	5733 M3 – M10 p. 16	5736 M2 – M10 p. 19
M	ISO 3 6G	DIN 371	5720 M3 – M10 p. 11					5719 M3 – M10 p. 18	
M	6HX	Guhring standard (long reach)		5718 M3 – M20 p. 15					
M	ISO 2 6H	DIN 376	5717 M3 – M20 p. 10				5722 M12 – M20 p. 14	5716 M3 – M20 p. 17	5736 M12 – M20 p. 19
M	6HX	DIN 376		5738 M3 – M24 p. 12					
MF	ISO 2 6H	DIN 374	5724 M4x0.5 – M20x1.5 p. 20		5740 M8x1 – M24x2 p. 21			5723 M4x0.5 – M20x1.5 p. 22	5739 M8x1 – M24x2 p. 23
UNC	2B	~ DIN 371	5726 Nr. 4-40 – 3/8 - 16 p. 24					5725 Nr. 4-40 – 3/8 - 16 p. 25	
UNC	2B	~ DIN 376	5726 7/16 - 14 – 3/4 - 10 p. 24					5725 7/16 - 14 – 3/4 - 10 p. 25	
UNF	2B	~ DIN 374	5728 Nr. 4-48 – 5/8 - 18 p. 26					5727 Nr. 4-48 – 5/8 - 18 p. 27	
G BSP-taps	–	DIN 5156	5732 G 1/8 – G 1 p. 28					5731 G 1/8 – G 1 p. 29	

Shank designs

DIN 371

DIN 376 / DIN 374 / DIN 5156


 d_1 0,9 ... 2,6 mm

 d_1 > 2,6 ... 10 mm

Typee clarification

NR40= Type N, RH spiral 40°

NR50= Type N, RH spiral 50°

Standard	Type	Form	Tolerance	Tool illustration	Tool material	Surface finish	d1	Guhring no.	Discount group	Standard range page
----------	------	------	-----------	-------------------	---------------	----------------	----	-------------	----------------	---------------------

Machine taps for ISO metric threads

DIN 371	N R40	C	ISO 2 / 6H			HSS-E		M 3 - M 10	5734	203	8
DIN 371	N R40	C	ISO 2 / 6H			HSS-E		M 2 - M 10	5737	203	9
DIN 376	N R40	C	ISO 2 / 6H			HSS-E		M 3 - M 20	5717	203	10
DIN 371	N R40	C	ISO 3 / 6G			HSS-E		M 3 - M 10	5720	203	11
DIN 376	N R40	C	6HX			HSS-E		M 3 - M 24	5738	203	12
DIN 371	N R40	E	ISO 2 / 6H			HSS-E		M 3 - M 10	5721	203	13
DIN 371 / 376	N R50	C	ISO 2 / 6H			HSS-E-PM		M 3 - M 20	5722	203	14
Guhring std.	N R40	C	6HX			HSS-E		M 3 - M 20	5718	203	15
DIN 371	N	B	ISO 2 / 6H			HSS-E		M 3 - M 10	5733	203	16
DIN 376	N	B	ISO 2 / 6H			HSS-E		M 3 - M 20	5716	203	17
DIN 371	N	B	ISO 3 / 6G			HSS-E		M 3 - M 10	5719	203	18
DIN 371 / 376	N	B	ISO 2 / 6H			HSS-E-PM		M 2 - M 20	5736	203	19



blind holes



steam tempered



through holes



TiN-coated



external cooling

Standard	Type	Form	Tolerance	Tool illustration		Tool material	Surface finish	d1	Guhring no.	Discount group	Standard range page
----------	------	------	-----------	-------------------	--	---------------	----------------	----	-------------	----------------	---------------------

Machine taps for ISO metric fine threads

DIN 374	N R40	C	ISO 2 / 6H			HSS-E		M4 x 0.5 - M20 x 1.5	5724	203	20
DIN 374	N R40	C	ISO 2 / 6H			HSS-E-PM		M8 x 1 - M24 x 2	5740	203	21
DIN 374	N	B	ISO 2 / 6H			HSS-E		M4 x 0.5 - M20 x 1.5	5723	203	22
DIN 374	N	B	ISO 2 / 6H			HSS-E-PM		M8 x 1 - M24 x 2	5739	203	23

Machine taps for UNC-threads

~ DIN 371/376	N R40	C	2B			HSS-E		Nr. 4-40 - 3/4-10	5726	203	24
~ DIN 371/376	N	B	2B			HSS-E		Nr. 4-40 - 3/4-10	5725	203	25

Machine taps for UNF-threads

~ DIN 374	N R40	C	2B			HSS-E		Nr. 4-48 - 5/8-18	5728	203	26
~ DIN 374	N	B	2B			HSS-E		Nr. 4-48 - 5/8-18	5727	203	27

Machine taps for BSP-threads

DIN 5156	N R40	C	-			HSS-E		G 1/8 - G1	5732	203	28
DIN 5156	N	B	-			HSS-E		G 1/8 - G1	5731	203	29





blind holes



steam tempered



external cooling

Guhring no.

5734

Standard

DIN 2184-1

Standard

DIN 371

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

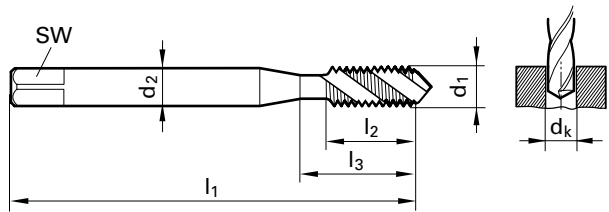

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	6.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	7.50	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	8.50	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	11.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	14.00	35.00	8.000
M10	1.50	10.000	8.00	8.500	100.00	16.00	39.00	10.000

Availability

●

●

●


●

●

●




S

203

 blind holes  steam tempered  external cooling	Guhring no.	5720
	Standard	DIN 2184-1
	Standard	DIN 371
	Tool material	HSS-E
	Type	N R40
	Form	C
	Tolerance	ISO 3 / 6G
	Cutting direction	right-hand
	Discount group	203

**TOLERANCE
ISO 3/6G**

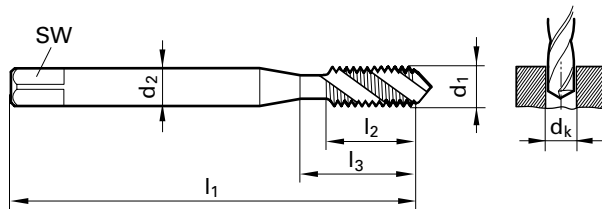

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	6.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	7.50	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	8.50	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	11.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	14.00	35.00	8.000
M10	1.50	10.000	8.00	8.500	100.00	16.00	39.00	10.000

Availability
●
●
●
●
●
●

for blind holes





blind holes



TiN-coated



external cooling

Guhring no.

5738

Standard

DIN 2184-1

Standard

DIN 376

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


6HX

Cutting direction

right-hand

Discount group

203

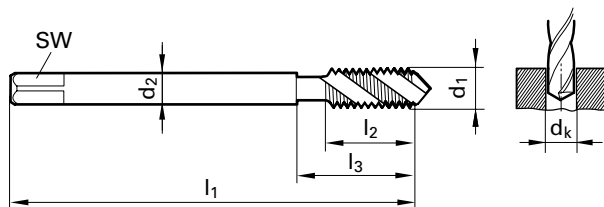


d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	2.200		2.500	56.00	6.00	18.00	3.000
M 4	0.70	2.800	2.10	3.300	63.00	7.50	21.00	4.000
M 5	0.80	3.500	2.70	4.200	70.00	8.50	25.00	5.000
M 6	1.00	4.500	3.40	5.000	80.00	11.00	30.00	6.000
M 8	1.25	6.000	4.90	6.800	90.00	14.00	35.00	8.000
M10	1.50	7.000	5.50	8.500	100.00	16.00	39.00	10.000
M12	1.75	9.000	7.00	10.20	110.00	18.50	49.00	12.000
M14	2.00	11.000	9.00	12.00	110.00	20.00	53.00	14.000
M16	2.00	12.000	9.00	14.00	110.00	20.00	54.00	16.000
M20	2.50	16.000	12.00	17.50	140.00	25.00	62.00	20.000
M24	3.00	18.000	14.50	21.00	160.00	30.00	73.00	24.000

Availability
●
●
●
●
●
●
●
●
●
●

 blind holes ☐ steam tempered ☒ external cooling	Guhring no.	5721
	Standard	DIN 2184-1
	Standard	DIN 371
	Tool material	HSS-E
	Type	N R40
	Form	E
	Tolerance	ISO 2 / 6H
	Cutting direction	right-hand
	Discount group	203

**FORM E
WITH SHORT
CHAMFER
LEAD**

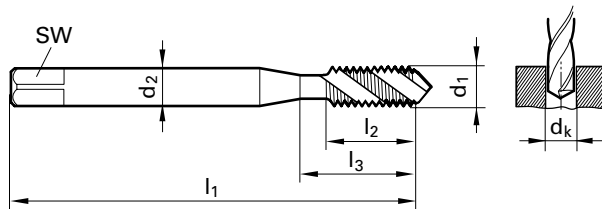

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	6.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	7.50	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	8.50	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	11.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	14.00	35.00	8.000
M10	1.50	10.000	8.00	8.500	100.00	16.00	39.00	10.000

Availability
●
●
●
●
●
●

for blind holes





blind holes



TiN-coated



external cooling

Guhring no.

5722

Standard

DIN 2184-1

Standard

DIN 371 / DIN 376

Tool material

HSS-E-PM

Type

N R50

Form

C

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

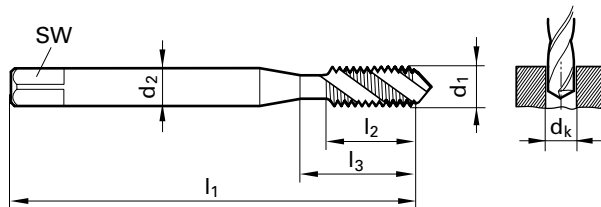

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	6.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	7.50	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	8.50	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	11.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	14.00	35.00	8.000
M 10	1.50	10.000	8.00	8.500	100.00	16.00	39.00	10.000
M 12	1.75	9.000	7.00	10.200	110.00	18.50	49.00	12.000
M 14	2.00	11.000	9.00	12.000	110.00	20.00	53.00	14.000
M 16	2.00	12.000	9.00	14.000	110.00	20.00	54.00	16.000
M 20	2.50	16.000	12.00	17.500	140.00	25.00	62.00	20.000

Availability
●
●
●
●
●
●
●
●
●

Guhring no.		5718
Standard		
Standard		Guhring standard
Tool material		HSS-E
Type		N R40
Form		C
Tolerance		6HX
Cutting direction		right-hand
Discount group		203




blind holes



TiN-coated



external cooling

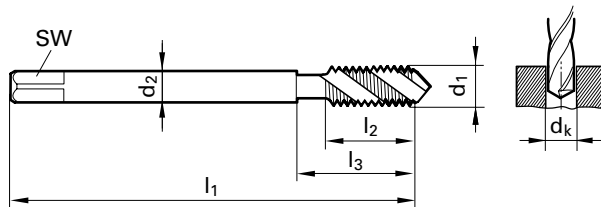

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	112.00	6.00	18.00	3.000
M 4	0.70	2.800	2.10	3.300	112.00	7.50	77.00	4.000
M 5	0.80	3.500	2.70	4.200	125.00	8.50	90.00	5.000
M 6	1.00	4.500	3.40	5.000	125.00	11.00	90.00	6.000
M 8	1.25	6.000	4.90	6.800	140.00	14.00	97.00	8.000
M 10	1.50	7.000	5.50	8.500	160.00	16.00	117.00	10.000
M 12	1.75	9.000	7.00	10.200	180.00	18.50	133.00	12.000
M 16	2.00	12.000	9.00	14.000	220.00	20.00	168.00	16.000
M 20	2.50	16.000	12.00	17.500	280.00	25.00	225.00	20.000

Availability
●
●
●
●
●
●
●
●
●
●
●
●
●
●

for blind holes



15



through holes



steam tempered



external cooling

Guhring no.

5733

Standard

DIN 2184-1

Standard

DIN 371

Tool material

HSS-E

Type

N

Form

B

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

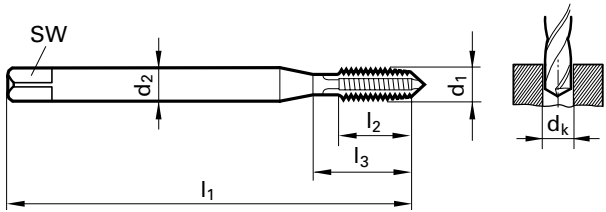

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	10.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	12.00	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	14.00	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	16.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	17.00	35.00	8.000
M10	1.50	10.000	8.00	8.500	100.00	20.00	39.00	10.000

Availability

●

●

●

●

●

●




through holes



steam tempered



external cooling

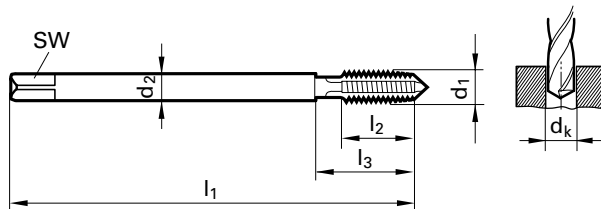Guhring no.**5716****Standard****DIN 2184-1****Standard****DIN 376****Tool material****HSS-E****Type****N****Form****B****Tolerance****ISO 2 / 6H****Cutting direction****right-hand****Discount group****203**

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	2.200		2.500	56.00	10.00	18.00	3.000
M 4	0.70	2.800	2.10	3.300	63.00	12.00	21.00	4.000
M 5	0.80	3.500	2.70	4.200	70.00	14.00	25.00	5.000
M 6	1.00	4.500	3.40	5.000	80.00	16.00	30.00	6.000
M 8	1.25	6.000	4.90	6.800	90.00	17.00	35.00	8.000
M10	1.50	7.000	5.50	8.500	100.00	20.00	39.00	10.000
M12	1.75	9.000	7.00	10.200	110.00	24.00	49.00	12.000
M14	2.00	11.000	9.00	12.000	110.00	26.00	53.00	14.000
M16	2.00	12.000	9.00	14.000	110.00	26.00	54.00	16.000
M20	2.50	16.000	12.00	17.500	140.00	32.00	62.00	20.000

Availability
●
●
●
●
●
●
●
●
●

for through holes





through holes



steam tempered



external cooling

Guhring no.

5719

Standard

DIN 2184-1

Standard

DIN 371

Tool material

HSS-E

Type

N

Form

B

Tolerance


ISO 3 / 6G

Cutting direction

right-hand

Discount group

203

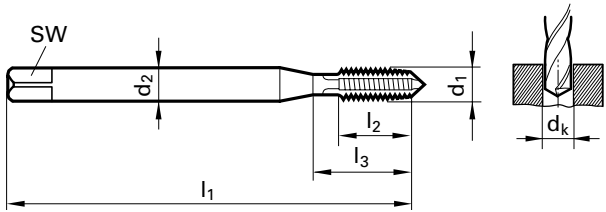

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 3	0.50	3.500	2.70	2.500	56.00	10.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	12.00	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	14.00	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	16.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	17.00	35.00	8.000
M10	1.50	10.000	8.00	8.500	100.00	20.00	39.00	10.000

Availability

●

●

●

●

●

●



through holes



TiN-coated



external cooling

Guhring no.

5736

Standard

DIN 2184-1

Standard

DIN 371 / DIN 376

Tool material

HSS-E-PM

Type

N

Form

B

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

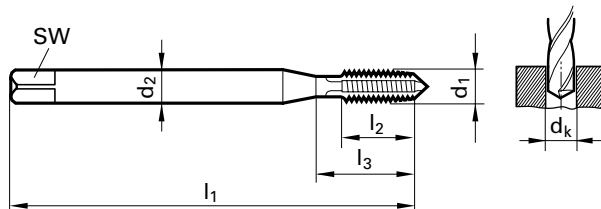

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	mm	mm		mm	mm	mm	mm	
M 2	0.40	2.800	2.10	1.600	45.00	8.00	13.50	2.000
M 3	0.50	3.500	2.70	2.500	56.00	10.00	18.00	3.000
M 4	0.70	4.500	3.40	3.300	63.00	12.00	21.00	4.000
M 5	0.80	6.000	4.90	4.200	70.00	14.00	25.00	5.000
M 6	1.00	6.000	4.90	5.000	80.00	16.00	30.00	6.000
M 8	1.25	8.000	6.20	6.800	90.00	17.00	35.00	8.000
M 10	1.50	10.000	8.00	8.500	100.00	20.00	39.00	10.000
M 12	1.75	9.000	7.00	10.200	110.00	24.00	49.00	12.000
M 14	2.00	11.000	9.00	12.000	110.00	26.00	53.00	14.000
M 16	2.00	12.000	9.00	14.000	110.00	26.00	54.00	16.000
M 18	2.50	14.000	11.00	15.500	125.00	30.00	62.00	18.000
M 20	2.50	16.000	12.00	17.500	140.00	32.00	62.00	20.000

Availability



for through holes





blind holes



steam tempered



external cooling

Guhring no.

5724

Standard

DIN 2184-1

Standard

DIN 374

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

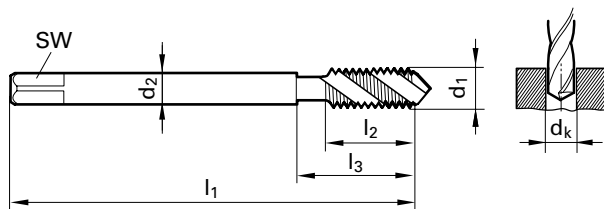


d1 X P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
M 4 X 0.5	2.800	2.10	3.500	63.00	5.00	21.00	4.003
M 5 X 0.5	3.500	2.70	4.500	70.00	5.00	25.00	5.003
M 6 X 0.75	4.500	3.40	5.200	80.00	8.00	30.00	6.004
M 8 X1	6.000	4.90	7.000	90.00	11.00	35.00	8.005
M10 X1	7.000	5.50	9.000	90.00	11.00	35.00	10.005
M10 X1.25	7.000	5.50	8.800	100.00	14.00	39.00	10.006
M12 X1	9.000	7.00	11.000	100.00	11.00	40.00	12.005
M12 X1.25	9.000	7.00	10.800	100.00	16.00	40.00	12.006
M12 X1.5	9.000	7.00	10.500	100.00	16.00	40.00	12.007
M14 X1	11.000	9.00	13.000	100.00	11.00	40.00	14.005
M14 X1.5	11.000	9.00	12.500	100.00	15.00	40.00	14.007
M16 X1	12.000	9.00	15.000	100.00	11.00	44.00	16.005
M16 X1.5	12.000	9.00	14.500	100.00	15.00	44.00	16.007
M20 X1.5	16.000	12.00	18.500	125.00	16.00	44.00	20.007

Availability



 blind holes  TiN-coated  external cooling	Guhring no.	5740
	Standard	DIN 2184-1
	Standard	DIN 374
	Tool material	HSS-E-PM
	Type	N R40
	Form	C
	Tolerance	ISO 2 / 6H
	Cutting direction	right-hand
	Discount group	203

**HSS-E-PM
+ TiN
FOR MAXIMUM
TOOL LIFE**

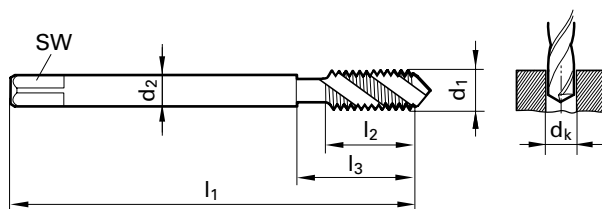

d1 X P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
M 8 X1	6.000	4.90	7.000	90.00	11.00	35.00	8.005
M10 X1	7.000	5.50	9.000	90.00	11.00	35.00	10.005
M10 X1.25	7.000	5.50	8.800	100.00	14.00	39.00	10.006
M12 X1	9.000	7.00	11.000	100.00	11.00	40.00	12.005
M12 X1.25	9.000	7.00	10.800	100.00	16.00	40.00	12.006
M12 X1.5	9.000	7.00	10.500	100.00	16.00	40.00	12.007
M14 X1	11.000	9.00	13.000	100.00	11.00	40.00	14.006
M14 X1.5	11.000	9.00	12.500	100.00	15.00	40.00	14.007
M16 X1.5	12.000	9.00	14.500	100.00	15.00	44.00	16.007
M18 X1.5	14.000	11.00	16.500	110.00	16.00	44.00	18.007
M20 X1.5	16.000	12.00	18.500	125.00	16.00	44.00	20.007
M22 X1.5	18.000	14.50	20.500	125.00	16.00	44.00	22.007
M24 X1.5	18.000	14.50	22.500	140.00	16.00	48.00	24.007
M24 X2	18.000	14.50	22.000	140.00	22.00	48.00	24.008

Availability
●
●
●
●
●
●
●
●
●
●
●
●
●
●



through holes



steam tempered



external cooling

Guhring no.

5723

Standard

DIN 2184-1

Standard

DIN 374

Tool material

HSS-E

Type

N

Form

B

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

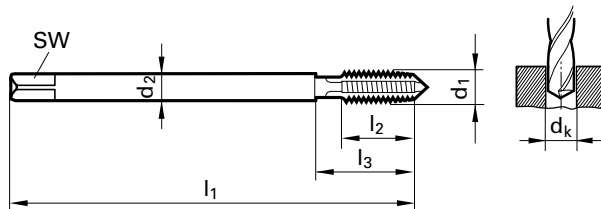

d1 X P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
M 4 X 0.5	2.800	2.10	3.500	63.00	8.00	21.00	4.003
M 5 X 0.5	3.500	2.70	4.500	70.00	10.00	25.00	5.003
M 6 X 0.75	4.500	3.40	5.200	80.00	13.00	30.00	6.004
M 8 X 1	6.000	4.90	7.000	90.00	17.00	35.00	8.005
M 10 X 1	7.000	5.50	9.000	90.00	17.00	35.00	10.005
M 12 X 1	9.000	7.00	11.000	100.00	20.00	40.00	12.005
M 12 X 1.5	9.000	7.00	10.500	100.00	20.00	40.00	12.007
M 14 X 1.5	11.000	9.00	12.500	100.00	20.00	40.00	14.007
M 16 X 1.5	12.000	9.00	14.500	100.00	22.00	44.00	16.007
M 20 X 1.5	16.000	12.00	18.500	125.00	25.00	44.00	20.007

Availability





through holes



TiN-coated



external cooling

Guhring no.

5739

Standard

DIN 2184-1

Standard

DIN 374

Tool material

HSS-E-PM

Type

N

Form

B

Tolerance


ISO 2 / 6H

Cutting direction

right-hand

Discount group

203

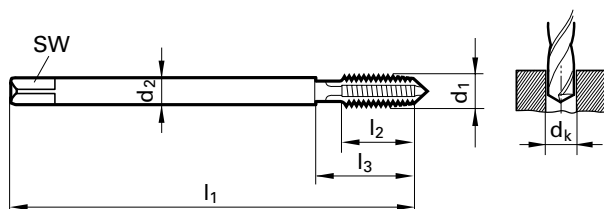

d1 X P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
M 8 X1	6.000	4.90	7.000	90.00	16.00	35.00	8.005
M10 X1	7.000	5.50	9.000	90.00	16.00	35.00	10.005
M10 X1.25	7.000	5.50	8.800	100.00	20.00	39.00	10.006
M12 X1	9.000	7.00	11.000	100.00	20.00	40.00	12.005
M12 X1.25	9.000	7.00	10.800	100.00	20.00	40.00	12.006
M12 X1.5	9.000	7.00	10.500	100.00	20.00	40.00	12.007
M14 X1	11.000	9.00	13.000	100.00	20.00	40.00	14.006
M14 X1.5	11.000	9.00	12.500	100.00	20.00	40.00	14.007
M16 X1.5	12.000	9.00	14.500	100.00	22.00	44.00	16.007
M18 X1.5	14.000	11.00	16.500	110.00	25.00	44.00	18.007
M20 X1.5	16.000	12.00	18.500	125.00	25.00	44.00	20.007
M22 X1.5	18.000	14.50	20.500	125.00	25.00	44.00	22.007
M24 X1.5	18.000	14.50	22.500	140.00	28.00	48.00	24.007
M24 X2	18.000	14.50	22.000	140.00	28.00	48.00	24.008

Availability



for through holes



23



blind holes



steam tempered



external cooling

Guhring no.

5726

Standard

DIN 2184-1

Standard

~ DIN 371 / ~ DIN 376

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


2B

Cutting direction

right-hand

Discount group

203

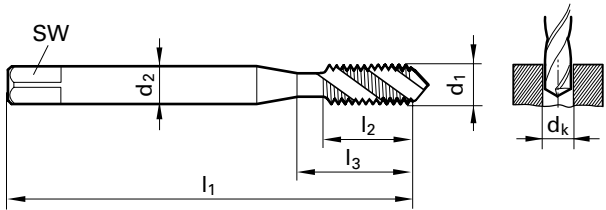


d1 - P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
NO. 4 -40	3.500	2.70	2.350	56.00	7.00	18.00	2.845
NO. 6 -32	4.000	3.00	2.850	56.00	8.00	20.00	3.505
NO. 8 -32	4.500	3.40	3.500	63.00	8.00	21.00	4.166
NO.10 -24	6.000	4.90	3.900	70.00	11.00	25.00	4.826
1/4 -20	7.000	5.50	5.100	80.00	13.00	30.00	6.350
5/16-18	8.000	6.20	6.600	90.00	14.00	35.00	7.938
3/8 -16	10.000	8.00	8.000	100.00	16.00	39.00	9.525
7/16-14	8.000	6.20	9.400	100.00	18.00	42.00	11.113
1/2 -13	9.000	7.00	10.800	110.00	20.00	49.00	12.700
5/8 -11	12.000	9.00	13.500	110.00	24.00	53.00	15.875
3/4 -10	14.000	11.00	16.500	125.00	25.00	62.00	19.050

Availability



for blind holes

 through holes ○ steam tempered ☒ external cooling	Guhring no.	5725
	Standard	DIN 2184-1
	Standard	~ DIN 371 / ~ DIN 376
	Tool material	HSS-E
	Type	N
	Form	B
	Tolerance	2B
	Cutting direction	right-hand
	Discount group	203

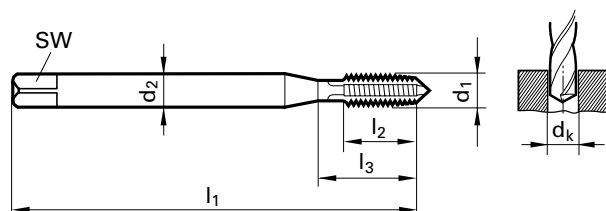

d1 - P	d2	SW	dk	l1	l2	l3	Code no.
mm	mm		mm	mm	mm	mm	
NO. 4 -40	3.500	2.70	2.350	56.00	11.00	18.00	2.845
NO. 6 -32	4.000	3.00	2.850	56.00	12.00	20.00	3.505
NO. 8 -32	4.500	3.40	3.500	63.00	13.00	21.00	4.166
NO.10 -24	6.000	4.90	3.900	70.00	14.00	25.00	4.826
1/4 -20	7.000	5.50	5.100	80.00	16.00	30.00	6.350
5/16-18	8.000	6.20	6.600	90.00	18.00	35.00	7.938
3/8 -16	10.000	8.00	8.000	100.00	20.00	39.00	9.525
7/16-14	8.000	6.20	9.400	100.00	22.00	42.00	11.113
1/2 -13	9.000	7.00	10.800	110.00	25.00	49.00	12.700
5/8 -11	12.000	9.00	13.500	110.00	30.00	53.00	15.875
3/4 -10	14.000	11.00	16.500	125.00	33.00	62.00	19.050

Availability
●
●
●
●
●
●
●
●
●
●



blind holes



steam tempered



external cooling

Guhring no.

5728

Standard

DIN 2184-1

Standard

~ DIN 374

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


2B

Cutting direction

right-hand

Discount group

203

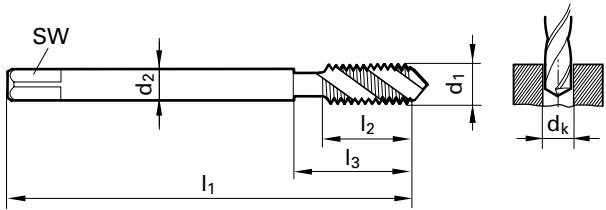

d1 - P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
NO. 4 -48	2.200		2.400	56.00	6.00	18.00	2.845
NO. 6 -40	2.500	2.10	2.950	56.00	6.50	20.00	3.505
NO.10 -32	3.500	2.70	4.100	70.00	8.50	25.00	4.826
1/4 -28	4.500	3.40	5.500	80.00	9.00	30.00	6.350
3/8 -24	7.000	5.50	8.500	90.00	11.00	35.00	9.525
5/8 -18	12.000	9.00	14.500	100.00	15.00	44.00	15.875

Availability





through holes



steam tempered



external cooling

Guhring no.

5727

Standard

DIN 2184-1

Standard

~ DIN 374

Tool material

HSS-E

Type

N

Form

B

Tolerance


2B

Cutting direction

right-hand

Discount group

203

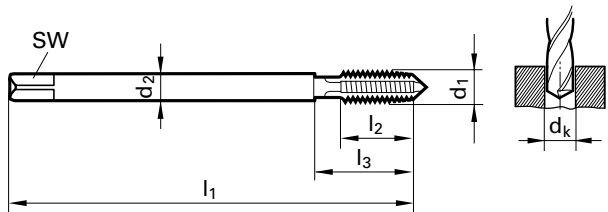

d1 - P	d2	SW	dk	l1	l2	l3	Code no.
	mm		mm	mm	mm	mm	
NO. 4 -48	2.200		2.400	56.00	10.00	18.00	2.845
NO. 6 -40	2.500	2.10	2.950	56.00	11.00	20.00	3.505
NO.10 -32	3.500	2.70	4.100	70.00	14.00	25.00	4.826
1/4 -28	4.500	3.40	5.500	80.00	16.00	30.00	6.350
3/8 -24	7.000	5.50	8.500	90.00	18.00	35.00	9.525
5/8 -18	12.000	9.00	14.500	100.00	22.00	44.00	15.875

Availability

●

●

●

●

●

●

for through holes



27



blind holes



steam tempered



external cooling

Guhring no.

5732

Standard

DIN 2184-1

Standard

DIN 5156

Tool material

HSS-E

Type

N R40

Form

C

Tolerance


-

Cutting direction

right-hand

Discount group

203

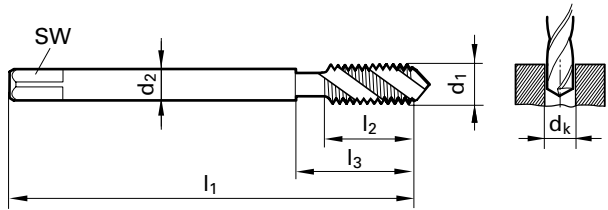

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	G/inch	mm		mm	mm	mm	mm	
G 1/8	28.00	7.00	5.50	8.800	90.00	11.00	35.00	9.728
G 1/4	19.00	11.00	9.00	11.800	100.00	14.00	40.00	13.157
G 3/8	19.00	12.00	9.00	15.250	100.00	14.00	44.00	16.662
G 1/2	14.00	16.00	12.00	19.000	125.00	18.00	44.00	20.955
G 3/4	14.00	20.00	16.00	24.500	140.00	20.00	53.00	26.441
G1	11.00	25.00	20.00	30.750	160.00	24.00	56.00	33.249

Availability

●

●

●


●

●

●

for blind holes

 through holes ● steam tempered ☒ external cooling	Guhring no.	5731
	Standard	DIN 2184-1
	Standard	DIN 5156
	Tool material	HSS-E
	Type	N
	Form	B
	Tolerance	-
	Cutting direction	right-hand
	Discount group	203

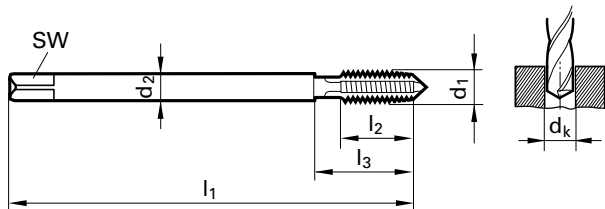

d1	P	d2	SW	dk	l1	l2	l3	Code no.
	G/inch	mm		mm	mm	mm	mm	
G 1/8	28.00	7.00	5.50	8.800	90.00	18.00	35.00	9.728
G 1/4	19.00	11.00	9.00	11.800	100.00	20.00	40.00	13.157
G 3/8	19.00	12.00	9.00	15.250	100.00	22.00	44.00	16.662
G 1/2	14.00	16.00	12.00	19.000	125.00	25.00	44.00	20.955
G 3/4	14.00	20.00	16.00	24.500	140.00	28.00	53.00	26.441
G1	11.00	25.00	20.00	30.750	160.00	30.00	56.00	33.249


Availability
●
●
●
●
●
●

for through holes



Why is Guhring increasingly offering Form E taps?


In addition to the conventional Form B and C for machine taps we are increasingly including Form E tools in our standard range. Thus, we are taking into account the increasing demand for taps with which threads can be produced as close as possible to the bottom of the bore when machining blind holes and to produce deepest threads as possible when machining through holes.

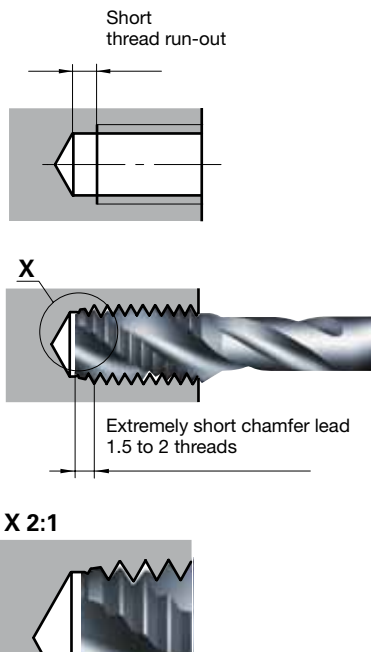

Taps with Form E feature an extremely short chamfer lead with only 1.5 to 2 threads. On modern machines and tapping chucks any inferior guidance of the tool in comparison to Forms B and C with long chamfer lead are eliminated. The run-out of the tap is impossible thanks to the rigid tool clamping. Taps with Form E can provide a significant advantage in the production of very deep reaching, fully tapped threads.


Conventional Forms B and C for machine taps

Form B




medium, 3.5 - 5.5 threads,
with spiral point,
for through holes

Form C



short, 2 - 3 threads
for blind holes


Definitions and angles

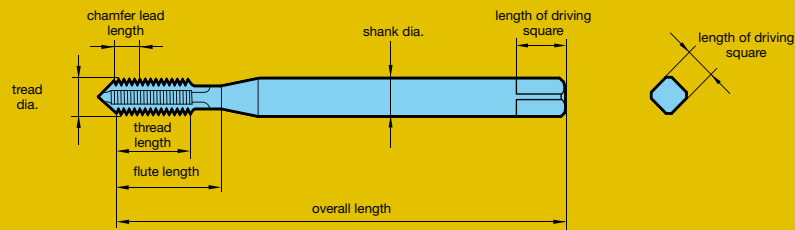

Flute forms



Types of centres

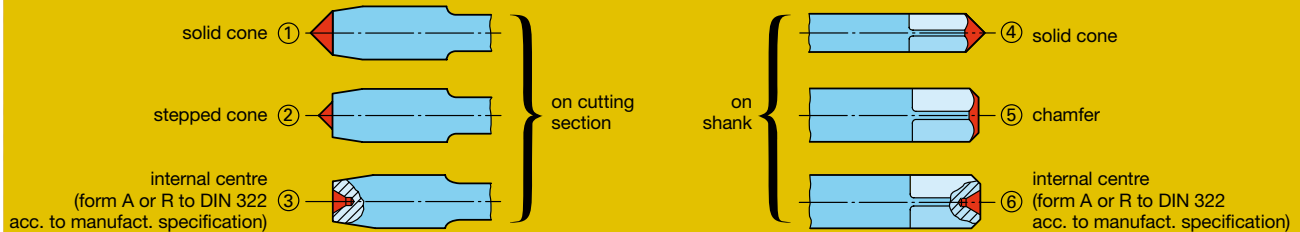

Thread dia. range mm	Centre on cutting section		Centre on shank
	with chamfer forms C, E	with chamfer form B	
≤ 4,2	①	①	④ ⑤ ⑥
> 4,2 ... 5,6	① ②	①	④ ⑤ ⑥
> 5,6 ... 10,0	① ② ③	① ② ③	④ ⑤ ⑥
> 10,0	③	③	⑥



	Tensile strength MPa (N/mm ²)	Hardness HB	Cutting speed v _c m/min*	
			HSS-E	HSS-E-PM
Structural steels	≤ 850	–	10 - 15	15 - 20
Free-cutting steels	≤ 1000	–	10 - 20	15 - 25
Unalloyed case hardened steels	≤ 750	–	10 - 15	15 - 20
Unalloyed heat-treatable steels	≤ 850	–	10 - 15	15 - 20
Alloyed case hardened steels	≥ 850 ... 1200	–	8 - 12	10 - 15
Alloyed heat-treatable steels	≥ 850 ... 1200	–	8 - 12	10 - 15
Alloyed tool steels	≤ 1000	–	6 - 10	8 - 12
High speed tool steels	≥ 650 ... 1000	–	6 - 10	8 - 12
Stainl./acid-resist. steels, sulphured	≤ 850	–	6 - 12	8 - 15
austenitic	≤ 850	–	6 - 12	8 - 15
martensitic	≤ 850	–	6 - 12	8 - 15
Aluminum and Al-alloys	≤ 400	–	15 - 20	20 - 25
Al wrought alloys	≤ 400	–	15 - 20	20 - 25
Al cast alloys ≤ 10 % Si	≤ 600	–	15 - 20	20 - 25
> 10 % Si	≤ 600	–	15 - 20	20 - 25
Cast iron	–	≤ 240	15 - 20	20 - 25
Spheroidal graphite iron	–	≤ 240	15 - 20	20 - 25
Malleable cast iron	–	< 300	15 - 20	20 - 25

* With coated tools V_c can be increased by up to 50%.

Tap size		Tapping size hole	Recommended core drills	
metric	inch	Ø mm		
M 2		1.600		
	NO. 4 -40	2.350		carbide micro-precision drill, 4 x D, without IC, Guhring no. 6400
	NO. 4 -48	2.400		carbide micro-precision drill, 5 x D, with IC, Guhring no. 6405
M 3		2.500		
	NO. 6 -32	2.850		GU 500, jobber drill, HSCO, Guhring no. 5523
	NO. 6 -40	2.950		
M 4		3.300		
	NO. 8 -32	3.500		
	NO.10 -24	3.900		
	NO.10 -32	4.100		
M 5		4.200		
M 6		5.000		
	1/4 -20	5.100		
M 6 X 0.75		5.200		
	1/4 -28	5.500		
	5/16-18	6.600		
M 8		6.800		RT 100 U, 5 x D, with IC, Guhring no. 5511
M 8 X1		7.000		
	3/8 -16	8.000		RT 100 U, 5 x D, without IC, Guhring no. 5515
M10	3/8 -24	8.500		
M10 X1.25	G 1/8	8.800		GU 500, jobber drill, HSCO, Guhring no. 5523
		9.000		
M10 X1		9.400		
	7/16-14	9.400		
M12		10.200		
M12 X1.5		10.500		
M12 X1.25	1/2 -13	10.800		
		11.000		
M12 X1		11.800		
	G 1/4	12.000		
M14		12.500		
M14 X1.5		13.000		
M14 X1		13.500		
	5/8 -11	14.000		
M16		14.500		
M16 X1.5	5/8 -18	15.000		
M16 X1		15.250		RT 100 U, 5 x D, with IC, Guhring no. 5511
	G 3/8	15.500		
M 18		16.500		RT 100 U, 5 x D, without IC, Guhring no. 5515
M18 X1.5	3/4 -10	17.500		
M20		18.500		
M20 X1.5		19.000		HT 800 holder 5 x D and insert, Guhring no. 4108 + 4112
	G 1/2			
M22 X1.5		20.500		
M24		21.000		
M24 X2		22.000		
M24 X1.5		22.500		HT 800 holder 5 x D and insert, Guhring no. 4108 + 4112
	G 3/4	24.500		
	G1	30.750		



GÜHROSync

0.3 mm minimal compensation
for up to 75% reduced axial forces

for internal, peripheral or
MQL cooling lubrication

high concentricity and
application speed

elastic polymer elements for effective axial
and torsion damping of force peaks

quick and simple handling, slim design

long-life metal spring packet with progressive
force/travel characteristic curve

maximum tool life
and thread accuracy

The new **GÜHROSync** tapping chuck

Synchro and hydraulic clamping technology intelligently combined

by **GUHRING**

SAME PRICE
MORE PERFORMANCE

GÜHROSYNC



by **GUHRING**

powertap

UNIVERSAL TAPS

MADE BY

GUHRING



Gühring oHG

PO box 100247 | 72423 Albstadt
Herderstraße 50-54 | 72458 Albstadt

Tel. +49 74 31 17-0
Fax +49 74 31 17-21279

info@guehring.de
www.guehring.de

No liability can be accepted for printing errors or technical changes of any kind.
Our Terms and Conditions of Payment apply. Available on request.